


FINAL ASSEMBLY BLOCK

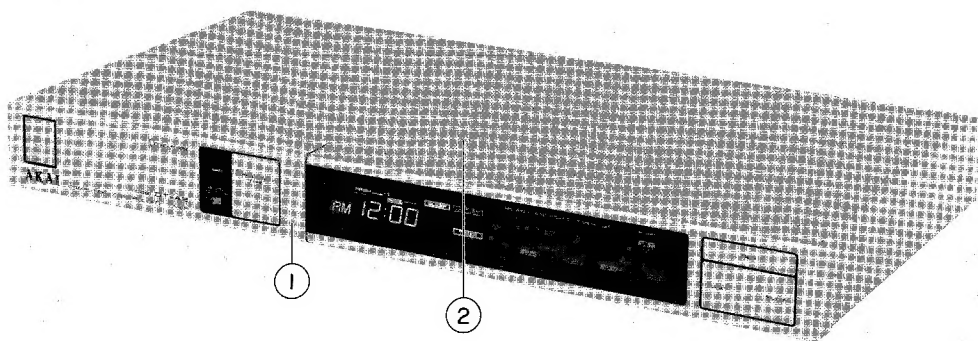

4. FINAL ASSEMBLY BLOCK

| REF. NO. | PARTS NO. | DESCRIPTION |
|----------|-----------|--------------------------|
| 4-1 | BD-712543 | PANEL FRONT ASSY DT-A2 |
| 4-1P | BD-712544 | PANEL FRONT ASSY DT-A2-P |
| 4-2 | BD-712550 | COVER UPPER DT-A2 |
| 4-2P | BD-712551 | COVER UPPER DT-A2-P |

SYMBOL FOR COLOR VARIATION
NON - SILVER
P - PEARL SHADOW

SYMBOL FOR DESTINATION

A : AAL (U.S.A.)
B : UK (England)
E : CEE (Europe)
S : SAA (Australia)
U : U/T (Universal Area)

INDEX

| PARTS NO. | REF. NO. | PARTS NO. | REF. NO. | PARTS NO. | REF. NO. | PARTS NO. | REF. NO. | PARTS NO. | REF. NO. |
|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|
| ED-708669 | 1-D11 | BD-712543 | 4-1 | EI-711473 | 2-IC2 | ES-711474 | 2-S4 | ZS-447761 | 3-8 |
| ED-708669 | 2-D20 | BD-712544 | 4-1P | EJ-343981 | 3-4E | ES-711474 | 2-S7 | | |
| ED-708669 | 2-D22 | BD-712545 | 3-2A | EJ-346641 | 3-4B | ES-711474 | 2-S13 | | |
| ED-708669 | 2-D18 | BD-712546 | 3-2E | EJ-349174 | 3-4U | ES-711474 | 2-S6 | | |
| ED-708669 | 2-D8 | BD-712547 | 3-2B | EJ-349535 | 3-4S | ET-342696 | 1-Q5 | | |
| ED-708669 | 2-D6 | BD-712548 | 3-2S | EM-344934 | 2-FLD1 | ET-350335 | 1-Q2 | | |
| ED-708669 | 2-D7 | BD-712549 | 3-2U | EQ-708677 | 1-RL1E | ET-350335 | 1-Q8 | | |
| ED-708669 | 2-D9 | BD-712550 | 4-2 | EQ-708679 | 1-RL1U | ET-350335 | 1-Q7 | | |
| ED-708669 | 2-D21 | BD-712551 | 4-2P | EQ-712561 | 1-RL1A | ET-350335 | 1-Q6 | | |
| ED-708669 | 2-D19 | BT-712555 | 3-1xU | ES-706968 | 3-9 | ET-350335 | 1-Q3 | | |
| ED-708669 | 2-D10 | BT-712556 | 3-1xE | ES-708680 | 3-5x | ET-706935 | 1-Q4 | | |
| ED-711466 | 1-D3 | BT-712557 | 3-1xB | ES-711474 | 1-S11 | ET-711469 | 1-Q1 | | |
| ED-711466 | 1-D1 | BT-712560 | 3-1xA | ES-711474 | 2-S9 | ET-712559 | 2-CDS | | |
| ED-711466 | 1-D2 | EC-706953 | 1-C11 | ES-711474 | 2-S12 | EW-306428 | 3-6U | | |
| ED-711468 | 2-D17 | ED-708669 | 1-D14 | ES-711474 | 2-S3 | EW-313884 | 3-6B | | |
| ED-711480 | 1-D4 | ED-708669 | 1-D13 | ES-711474 | 2-S1 | EW-328245 | 3-6A | | |
| EF-690996 | 1-F1E | ED-708669 | 1-D16 | ES-711474 | 2-S10 | EW-336923 | 3-6E | | |
| EF-691007 | 1-F1B | ED-708669 | 1-D15 | ES-711474 | 2-S8 | EW-336924 | 3-6S | | |
| EI-711471 | 1-X1 | ED-708669 | 1-D5 | ES-711474 | 2-S2 | EZ-631945 | 3-7 | | |
| EI-711472 | 1-IC1 | ED-708669 | 1-D12 | ES-711474 | 2-S5 | SA-712552 | 3-3 | | |

DT-A2

AKAI SERVICE MANUAL



COMPUTER CONTROLLED TIMER

MODEL DT-A2

I. SPECIFICATIONS

| | |
|--------------------------|---|
| TIMER ACCURACY | ±15 seconds within one month (approx. 20°C) |
| TIMER BASE | Quartz oscillator |
| TIMER OPERATION ACCURACY | Less than 0.2 seconds |
| TIMER DISPLAY | 24 hour notation for Europe, and Australia 12 hour notation for other countries |
| TIMER SYSTEM | Daily type |
| TIMER SET PERIOD | 1 minute to 23 hours and 59 minutes |
| AC OUTLETS | SWITCHED x1 for Europe (except UK) and Australia SWITCHED x4 for UK SWITCHED x2 for other countries |
| POWER REQUIREMENTS | 120V, 60Hz for USA 220V, 50Hz for Europe except UK 240V, 50Hz for UK and Australia 110V/120V/220V/240V, 50/60Hz switchable for other countries |
| DIMENSIONS | 440 (X) x 52 (H) x 225 (D) mm (17.3 x 2.0 x 8.9 inches) |
| WEIGHT | 2.0kg (4.4lbs) |

* For improvement purposes, design and specifications are subject to change without notice.

II. VOLTAGE CONVERSION

VOLTAGE CONVERSION

Models for Europe, USA, UK and Australia are not equipped with this facility, each machine is preset at the factory according to destination, but some machines can be set to 110V, 120V, 220V or 240V as required.

If your machine's voltage can be converted:

- 1) Disconnect the power cord.
- 2) Turn the VOLTAGE SELECTOR located on the rear panel with a screwdriver until the correct voltage is indicated.

